




Configuration

- Modular Anodised aluminium display system
- Suitable for 3m x 6m to 3m x 9m stands
- Storeroom
- Installation / Dismantle
- Graphics

MAX[®]DECK

Aesthetic & Solid

Recycling aluminium produces significant cost savings as you can capitalise on the re-usage and double up the energy it saved. MaxDeck harnesses both the cost saving concept and doubles up on the convenience. Furnished with avant-garde design concept, MaxDeck will surely make any display stand out from the floor and from all angles.

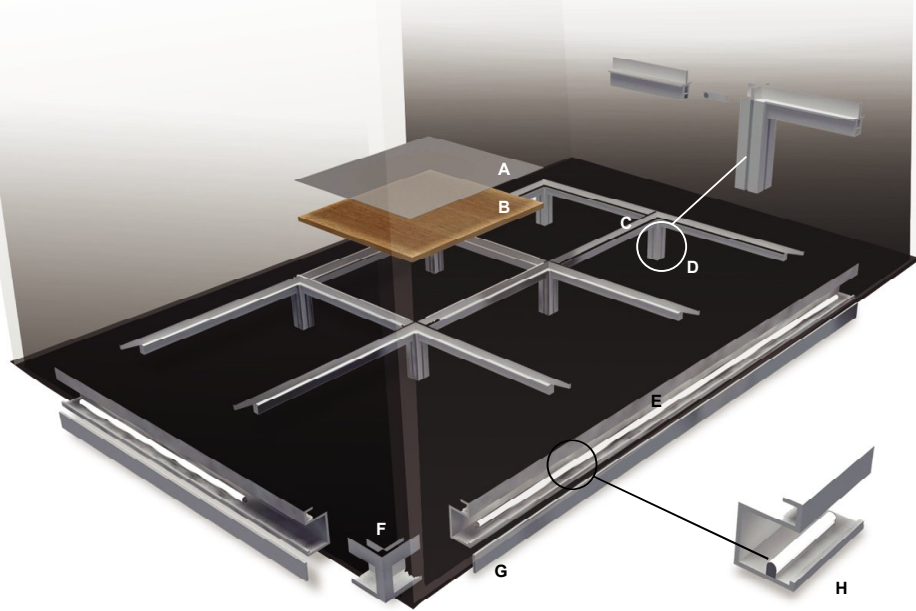

MAX[®] DECK Specification

- A. Toughened Glass
- B. Acrylic Sheet
- C. Glass Floor Retainer
- D. Stage Foot
- E. Edge Extrusion
- F. Edge Corner
- G. Acrylic Sheet
- H. T4 Light

Technical Characteristic

- Maximum spans	6m
- Maximum weight capacity	350kg/m ²
- Head room	2.791m
- Height of flooring	2.496m
- Maximum height	6.420m

Stair Level

- Maximum width	1.162m
- Minimum height	1.10m

Maximum width between uprights	
- Without cross bracing 0.550m to 6m	6m
- With cross bracing 1m to 4m	4m

